



Pneumatic Three Way Switching Damper For Chemical Industry And Grain Transportation With High Performance

Our Product Introduction

Basic Information

- Place of Origin: China
- Brand Name: FABIA
- Certification: FM, AMCA, ISO9001, CE, CCS, DNV CCS
- Model Number: 4inch-28inch
- Minimum Order Quantity: 1 set
- Price: Negotiable
- Packaging Details: Cartons/Wooden cases
- Delivery Time: 15-30 work days
- Payment Terms: L/C, D/A, D/P, T/T, MoneyGram, Western Union
- Supply Ability: 100-1000 set per week



Product Specification

- Product Name: Three-way Switching Damper
- Valve Connection: Clamp
- Material: Stainless Steel
- Valve Body: Stainless Steel
- Control Mode: Pneumatic
- Design Pressure: ± 2000 Pa
- Apply: Chemical Industry And Grain Transportation
- Highlight: **Pneumatic Three-way switching damper ,
Chemical Industry Three-way switching damper ,
Grain Transportation Three-way switching damper**



More Images



Product Description

Pneumatic Three-way switching damper for chemical industry and grain transportation with high performance

1. Description:

This valve is mainly used in chemical and grain machinery conveying systems. Mainly used for switching between conveying branches. According to the needs, the angle between the two branch pipes can be customized and processed according to the needs.

2. Specification:

| Product No. | Size | Thickness (body) | Thickness (blade) | D(shaft) | Control Model |
|----------------|------|------------------|-------------------|----------|---------------|
| FB-TSD-0100-01 | D100 | 3.0 | 4.0 | D30 | Pneumatic |
| FB-TSD-0150-02 | D150 | 3.0 | 4.0 | D30 | |
| FB-TSD-0200-03 | D200 | 3.0 | 4.0 | D30 | |
| FB-TSD-0250-04 | D250 | 3.0 | 4.0 | D30 | |
| FB-TSD-0300-05 | D300 | 3.0 | 4.0 | D30 | |
| FB-TSD-0350-06 | D350 | 3.0 | 4.0 | D30 | |
| FB-TSD-0400-07 | D400 | 4.0 | 5.0 | D50 | |
| FB-TSD-0450-08 | D450 | 4.0 | 5.0 | D50 | |
| FB-TSD-0500-09 | D500 | 4.0 | 5.0 | D50 | |
| FB-TSD-0550-10 | D550 | 4.0 | 5.0 | D50 | |
| FB-TSD-0600-11 | D600 | 4.0 | 5.0 | D50 | |
| FB-TSD-0650-12 | D650 | 4.0 | 5.0 | D50 | |
| FB-TSD-0700-13 | D700 | 4.0 | 5.0 | D50 | |
| FB-TSD-FREE | FREE | | | | |

3. Features:


Material:Stainless steel

Contact type jog switch,70 fireproof probe, 180 smoke exhaust probe

Pressure Design:±2000Pa

Including access door for maintenance

When the cylinder controls the left and right movement of the blades, the left and right branch pipes are used as both channels and limits, which is more space saving than installing a butterfly valve on each of the two branches, and there is no obstruction from the blades when conveying the medium.

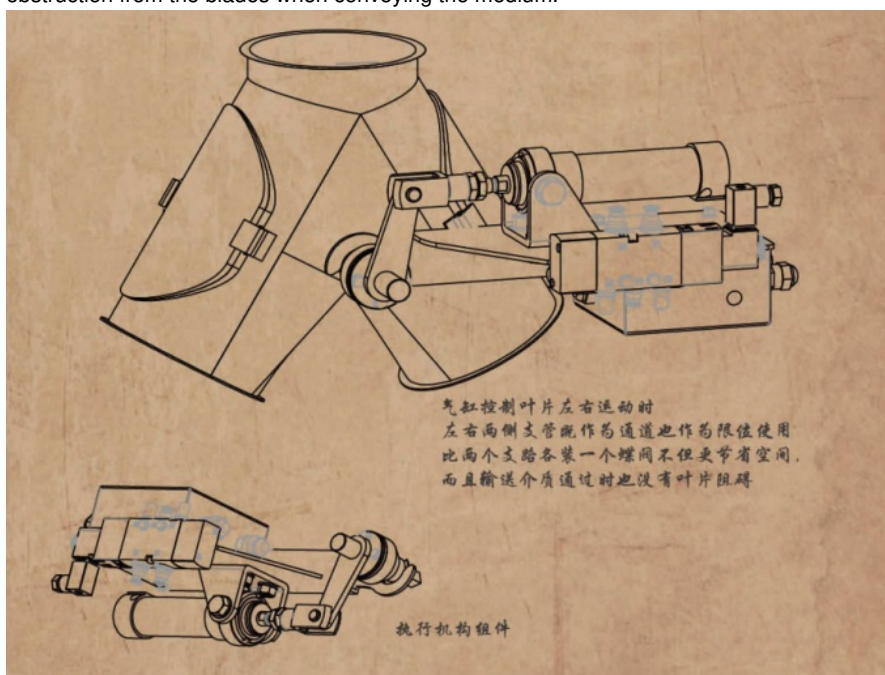



FABIA
INTERNATIONAL Fabia Valve Industry (Suzhou) Co., Ltd.

+8618913247051/+8618912658215/+8618260178084

sales@fabia-china.com

fbballvalve.com

Room 1305, Building 3, Jundi Business Plaza, No.3, Weihua Road, Suzhou Industrial Park